

Page Number	101-025
Effective	Oct 2015
Replaces	Dec 2007
Section	101

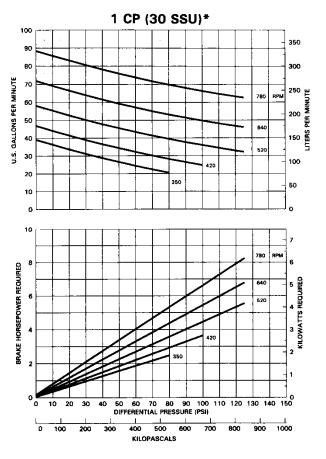

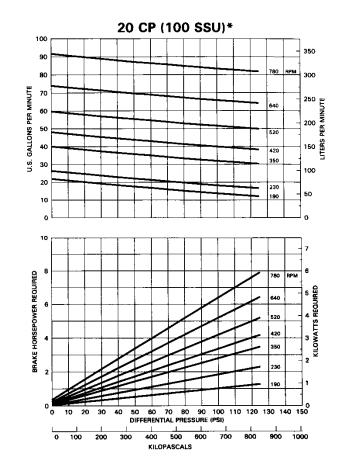



Note: Non-metallic vanes Only.

Note: Non-metallic vanes Only.

Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

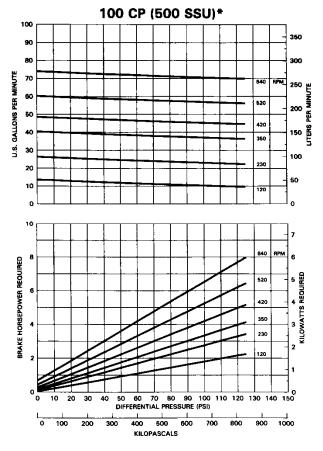

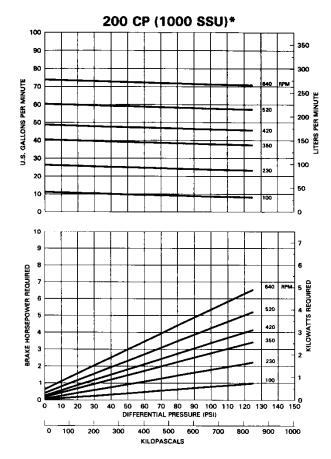

Note: Non-metallic or metallic vanes.


Note: Non-metallic or metallic vanes.


Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.



CHARACTERISTIC CURVES Models:GX2, X2, XH2

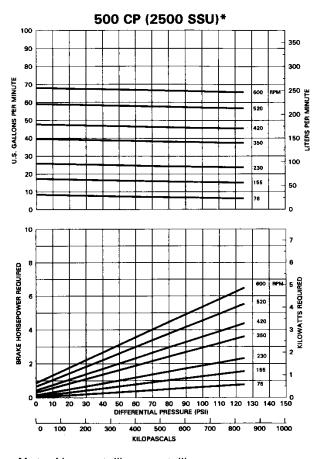

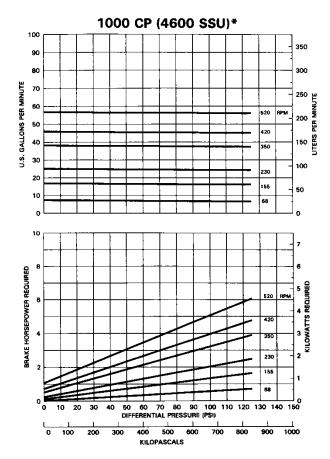

Note: Non-metallic or metallic vanes.


Note: Non-metallic or metallic vanes.

Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.


Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.



CHARACTERISTIC CURVES Models:GX2, X2, XH2

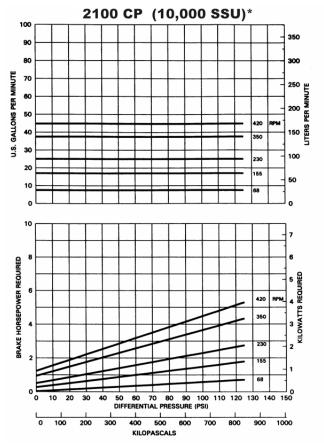

Note: Non-metallic or metallic vanes. Metallic vanes recommended above 2100 cP (10,000 SSU).

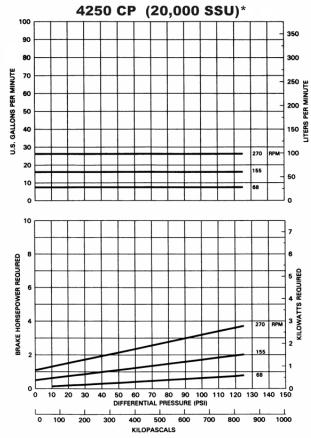

Note: Metallic vanes recommended.

Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHp.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

